

PUBLIC ADDRESS / AMPLIFIERS / MONO

## PROX-60

PA SINGLE ZONE AMPLIFIER



RADIO



USB

- ✓ Excellent sound quality
- ✓ Modern and discreet design
- ✓ USB/FM player
- ✓ Compact size, for desktop use
- ✓ Secure, easy-to-connect euroblock connectors

ESPECIALLY RECOMMENDED IN:



Factories



Sports facilities



Education



All sectors

DESCRIPTION


Amplifier with USB/FM player for PA systemsA perfect solution that integrates amplifier, mixer, player, microphone inputs, and auxiliary inputs in one unit, designed for PA installations with 100 V line or low impedance loudspeakers, requiring intuitive operation and budget-friendly pricing.Euroblock connectors, secure and easy to connect.High sound quality.Sleek and modern design.Compact size, suitable for desktop use.For PA and background music systems with 100 V line speakers or low impedance speakers. Ideal for retail stores, schools, monuments, exhibitions, bars, restaurants, etc.

TECHNICAL CHARACTERISTICS


FEATURES	Public address amplifier. USB/FM player. Microphone input with mix, gain and priority level control. Tone controls. 100 V and 4 Ohm outputs.
POWER	60 W RMS
RESPONSE	20-20,000 Hz ± 3 dB
DISTORTION	Harmonic: <1% at 1 kHz
INPUTS	1 balanced / unbalanced mic, euroblock / 6.3 mm jack, 600 Ohm 6 mV RMS 1 balanced mic, euroblock, 600 Ohm 6 mV RMS 2 aux, euroblock / 2 x RCA, 47,000 Ohm 300 mV RMS 1 x 100 V line , euroblock
FUNCTIONS	Input priority. Emergency Input 100V with maximum priority, attenuates all other inputs. Mute by contact closure, attenuates all inputs except the 100V Emergency input. Microphone 1 and 2 with priority over Aux and Playback inputs, by signal level, selectable. Power on, protection, signal peak and output signal indicator lights. Fanless induction cooling


CONTROLS	Microphone volume Selected input volume Input selector USB/FM player controls Tone: Bass and treble Microphone gain and priority
PLAYER	USB player with background music playback mode. When switched on, playback starts automatically FM digital tuner with presets and automatic scanning Memory of last mode selected (USB or FM), last song played or last station tuned. Starts playback in successive order
IMPEDANCE	4 Ohm and 100 V line, euroblock
POWER SUPPLY	230/115 V AC, 200 W
DIMENSIONS	286 x 84 x 225 mm depth
WEIGHT	4.4 kg
ACCESSORIES	FM antenna

Frequency reponse

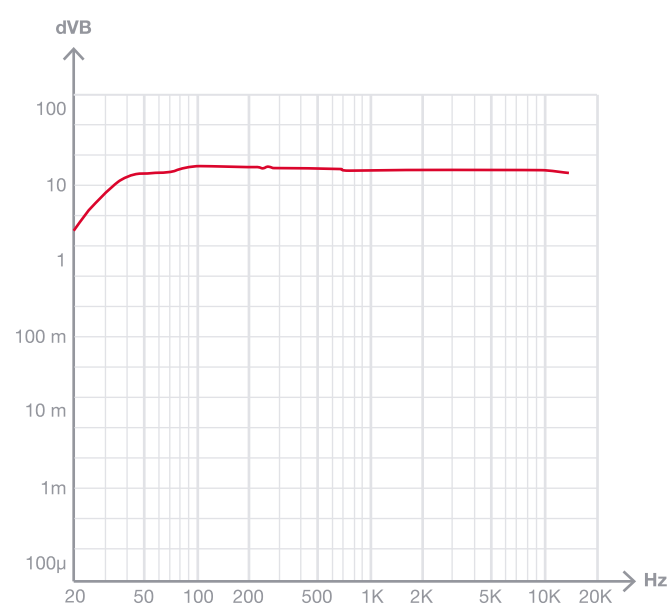

Block diagram

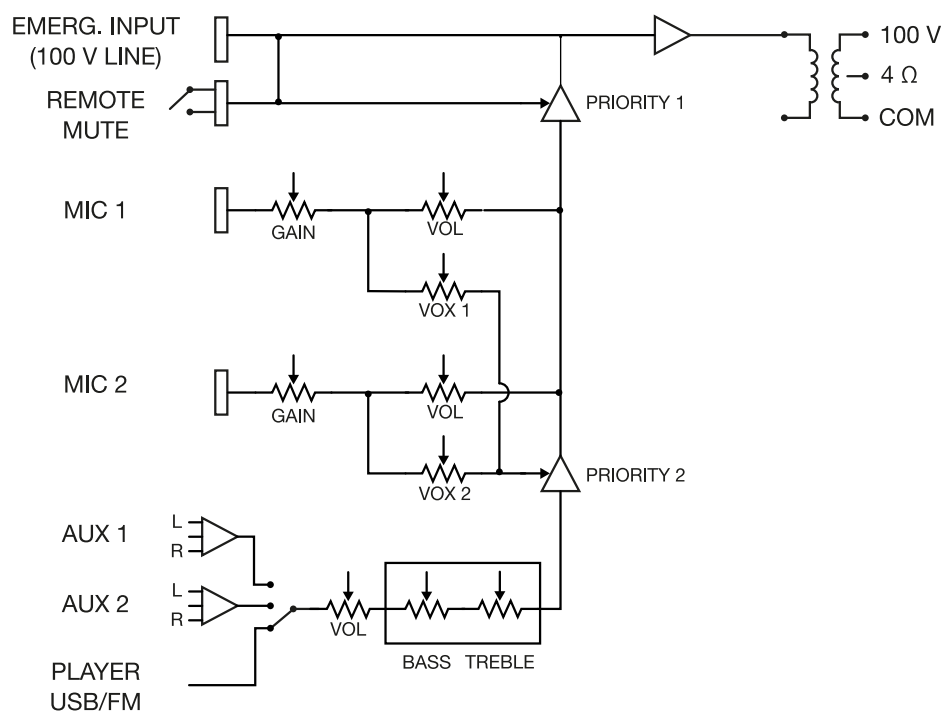

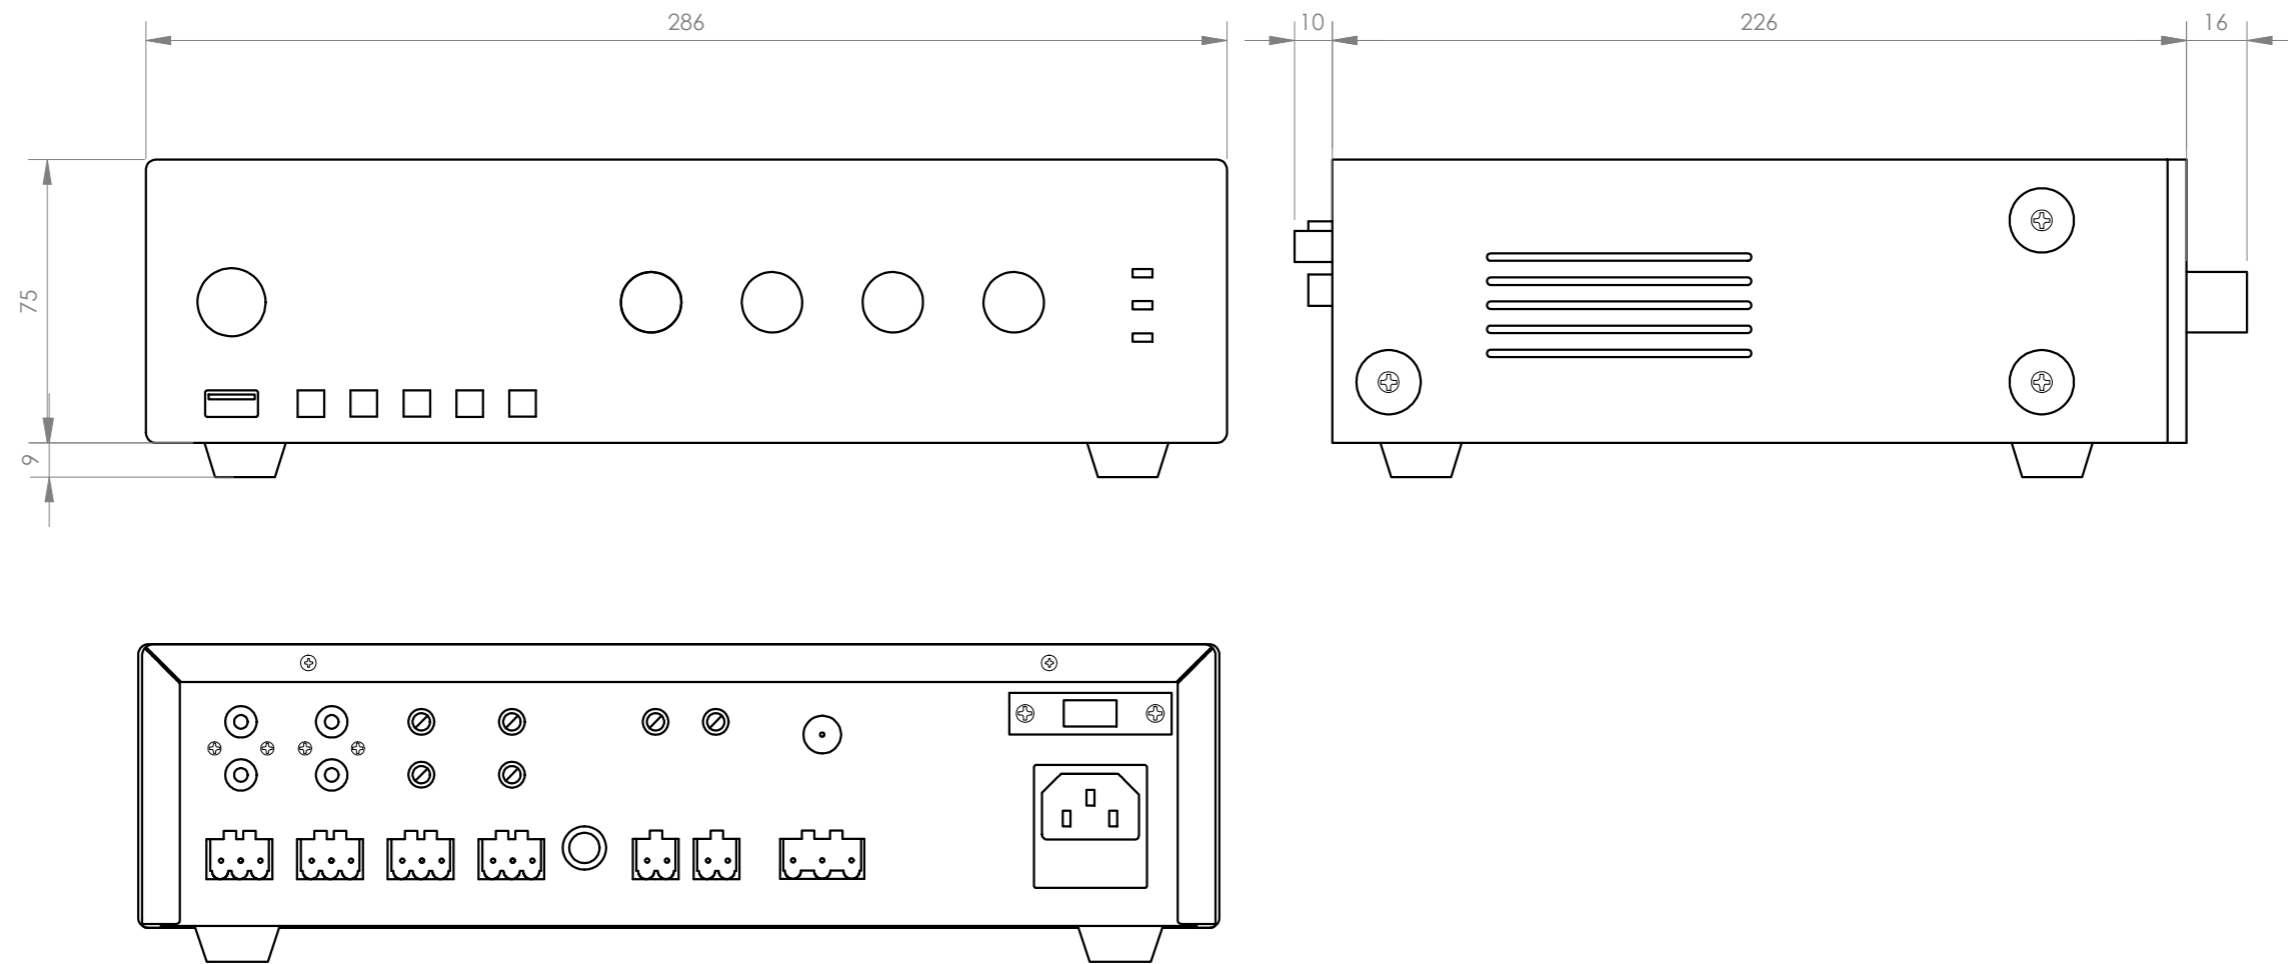

<b>FONESTAR</b>	Model	Description	Units	Scale
	PROX-60	PA SINGLE ZONE AMPLIFIER	mm	1:2