

PUBLIC ADDRESS / SPEAKERS / CEILING

GAT-96S

100 V LINE TRANSFORMER CEILING SPEAKER



- ✓ Crisp and clean sound
- ✓ Large coverage angle
- ✓ Surface mounting system

ESPECIALLY RECOMMENDED IN:



Hospitality



Retail



Hotels






All sectors

DESCRIPTION

Surface mount ceiling speakerProvides a crisp, clean sound, perfect for both voice and background music.Wide coverage angle of 130° allows a larger area to be covered depending on the ceiling height.It has a quick installation system that minimizes assembly time.For background music and voice announcements in 100 V line installations in offices, small shops, restaurants, waiting rooms, etc.

TECHNICAL CHARACTERISTICS

FEATURES	Surface mount ceiling loudspeaker with 100 V line transformer and round grille.
POWER	10 W maximum, 6 W RMS
LOUDSPEAKERS	6 ½" double cone
RESPONSE	110–20,000 Hz
DISPERSION	130°
IMPEDANCE	6 W RMS@100V (1,650 Ohm) 3 W RMS@100V (3,300 Ohm) 1.5 W RMS@100V (6,600 Ohm) 0.75 W RMS@100V (13,300 Ohm) 0.25 W RMS@100V (40,000 Ohm)
SENSITIVITY	93 dB at 1 W/1 m
MATERIAL	ABS
COLOUR	White
DIMENSIONS	203 mm Ø x 90 mm depth
WEIGHT	0.9 kg
ACCESSORIES	Surface installation system

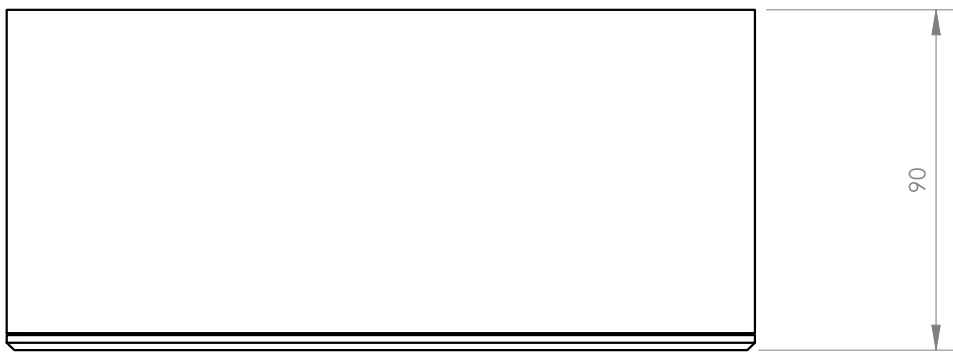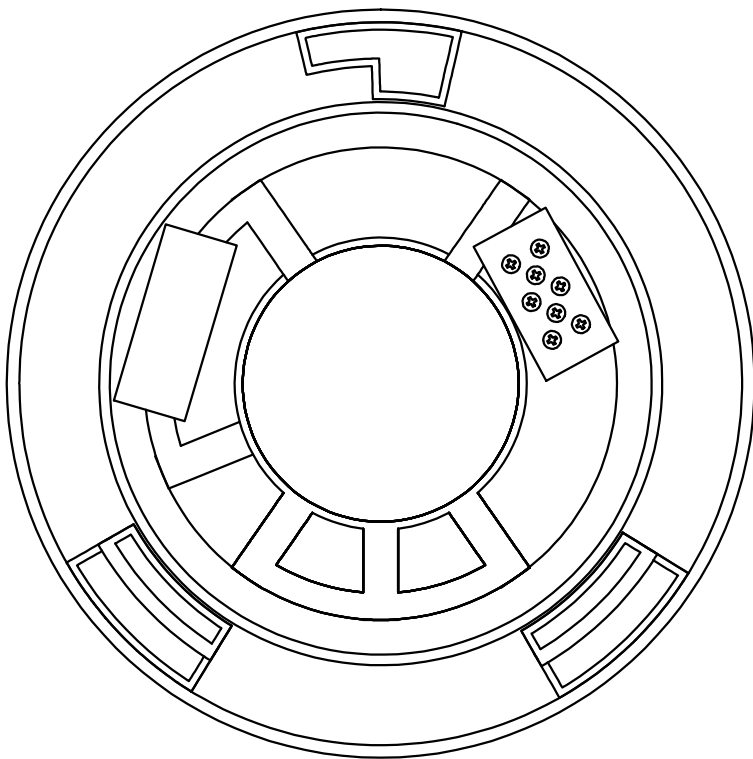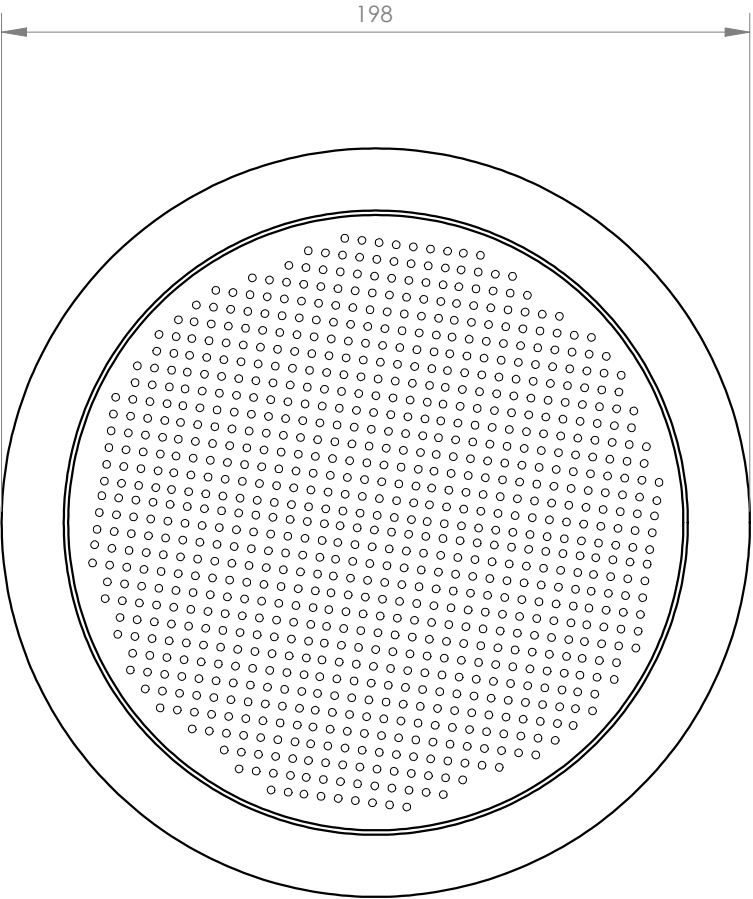

FONESTAR	Model	Description	Units	Scale
	GAT-96S	100 V LINE TRANSFORMER CEILING SPEAKER	mm	1:2