

SYSTEMS AND CONTROL / ZONE SYSTEMS / ANALOGUE

## ZS-1112R

10 ZONE CONTROL UNIT FOR DIMMER PRIORITY ACTIVATION WITH 24 V RELAY.



- ✓ High reliability
- ✓ Expandable to 300 zones.
- ✓ Cat 5e cable connection
- ✓ RS-485 communication

ESPECIALLY RECOMMENDED IN:



Education



Hotels






All sectors

DESCRIPTION

10 zone control unit for priority activation in attenuators with 24 V relay.

TECHNICAL CHARACTERISTICS

FEATURES	<p>10-zone control unit for priority activation of dimmers with 24 V relay.</p> <p>Expandable to 300 zones.</p> <p>Connection Cat 5e cable, RS-485 communication that can reach up to 1000 metres.</p> <p>ZS-1112R</p> <p>Works alongside the ZSC-1110 alarm control unit. It activates the 24 V priority for dimmers when there is a message sent from the ZS-11 microphone.</p> <p>The ALARM-IN function has no automatic reset. It needs to be reset manually.</p>
INPUTS	<p>1 zone extension, RJ-45</p> <p>2 alarm activation through contact closure, screw terminals</p>
OUTPUTS	<p>10 24 V for relay activation in attenuators, screw terminals</p> <p>1 zone extension, RJ-45</p> <p>2 alarms through contact closure, screw terminals</p>
POWER SUPPLY	<p>230 V AC, 220 W</p>
DIMENSIONS	<p>484 x 88 x 303 mm depth. 2 U 19" rack</p>
WEIGHT	<p>6.2 kg</p>

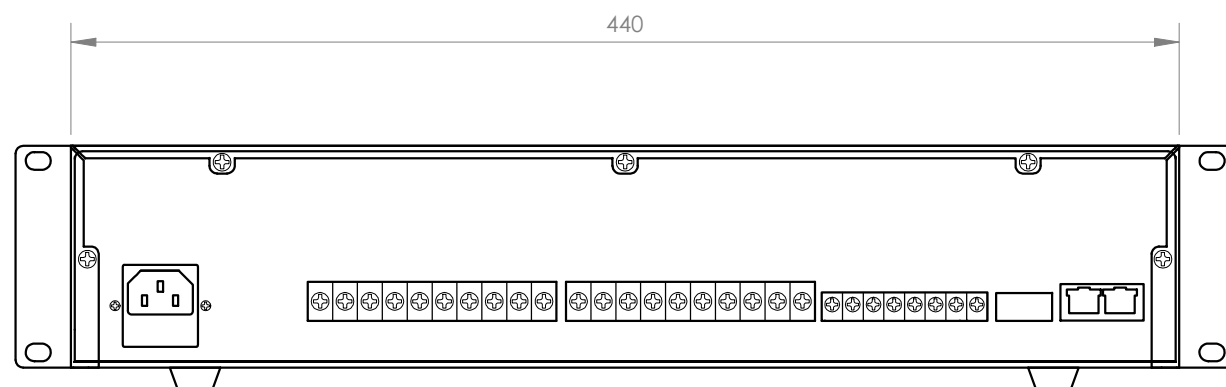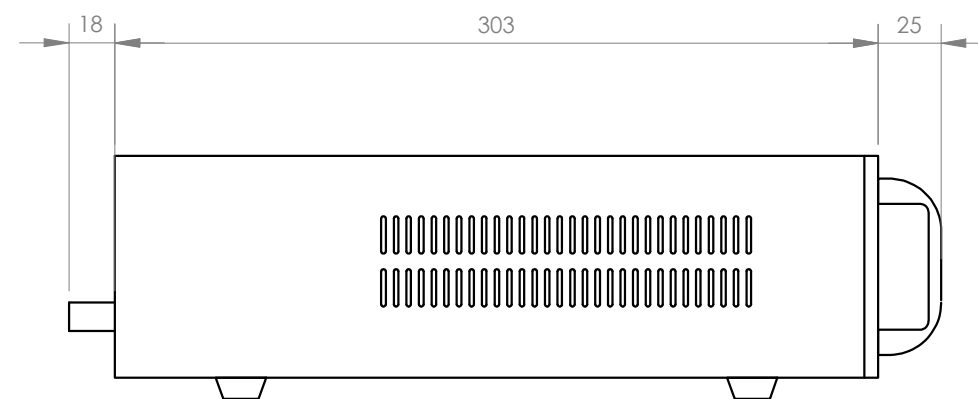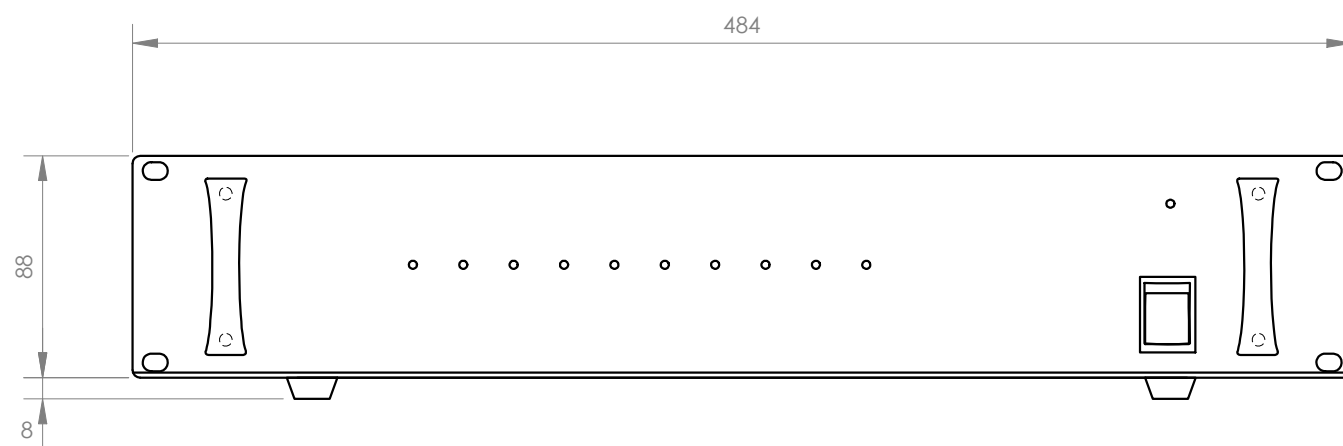

<b>FONESTAR</b>	Model ZS-1112R	Description 10 ZONE CONTROL UNIT FOR DIMMER PRIORITY ACTIVATION WITH 24 V RELAY	Units	Scale
			mm	1:3