


PUBLIC ADDRESS / SPEAKERS / SURFACE

TDO-45

70 AND 100 V LINE TRANSFORMER SURFACE SPEAKER

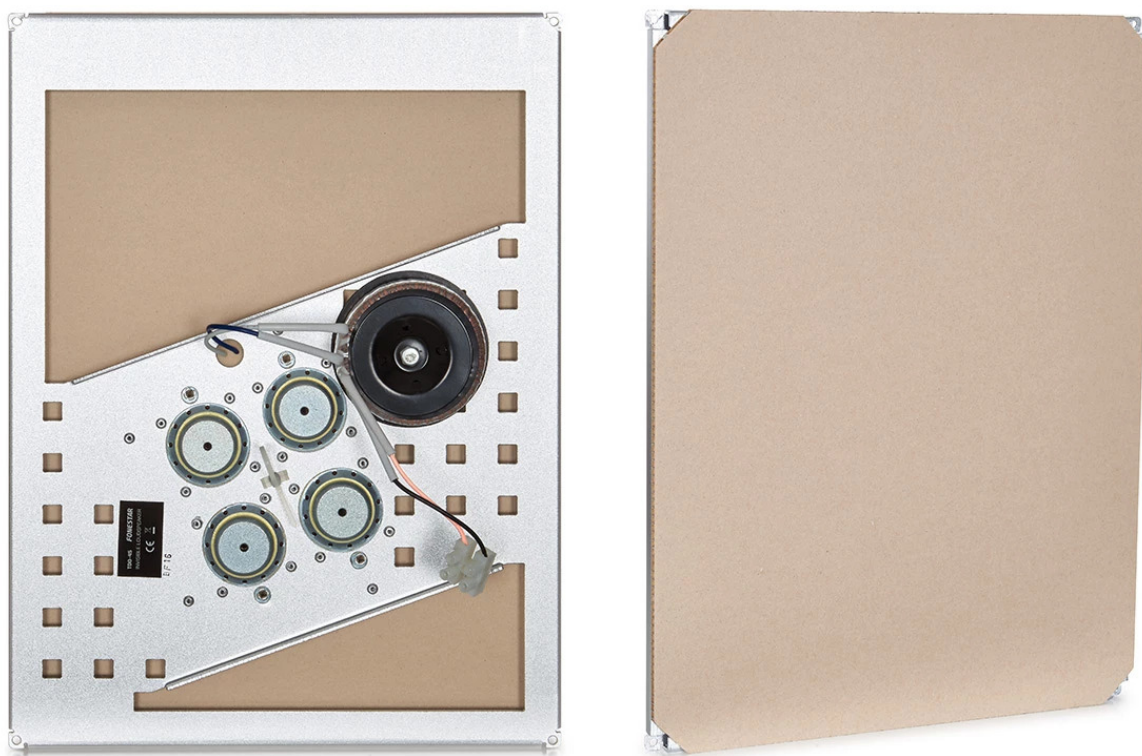

- ✓ Create a musical ambience without any visual impact
- ✓ Non-directional sound, wide coverage with great sound quality
- ✓ Long service life

ESPECIALLY RECOMMENDED IN:



Hospitality



Retail



Hotels




All sectors

DESCRIPTION

Invisible speakerInvisible surface speaker with 70 and 100 V line transformer. Allows to cover open areas with sound, completely hidden behind the plasterboard panels, creating a musical ambience without any visual impact.It reproduces sound by vibrating the radiant surface and offers ample coverage with great sound quality.For background music in 100 V line installations in offices, small shops, restaurants, waiting rooms, etc.

TECHNICAL CHARACTERISTICS

FEATURES	Invisible loudspeaker with 70 and 100 V line transformer Plasterboard panel installation, with accessories for installation in 12.5 mm plasterboard. Sound is produced via radiating surface vibration. Non-directional sound. Long product life.
POWER	60 W maximum, 40 W RMS
DRIVERS	4
RESPONSE	140-20,000 Hz
IMPEDANCE	High Z 100 V line: 250 Ohm (40 W)
SENSITIVITY	90 dB ±3 dB at1 W/1 m
DISPERSION	180°
MATERIAL	Aluminium
DIMENSIONS	300 x 400 x 50 mm depth
WEIGHT	1.45 kg
ACCESSORIES	1 cutting template 4 MDF wood installation dowels with foam 8 screws
OPTIONAL	TDO-45BOX: installation box

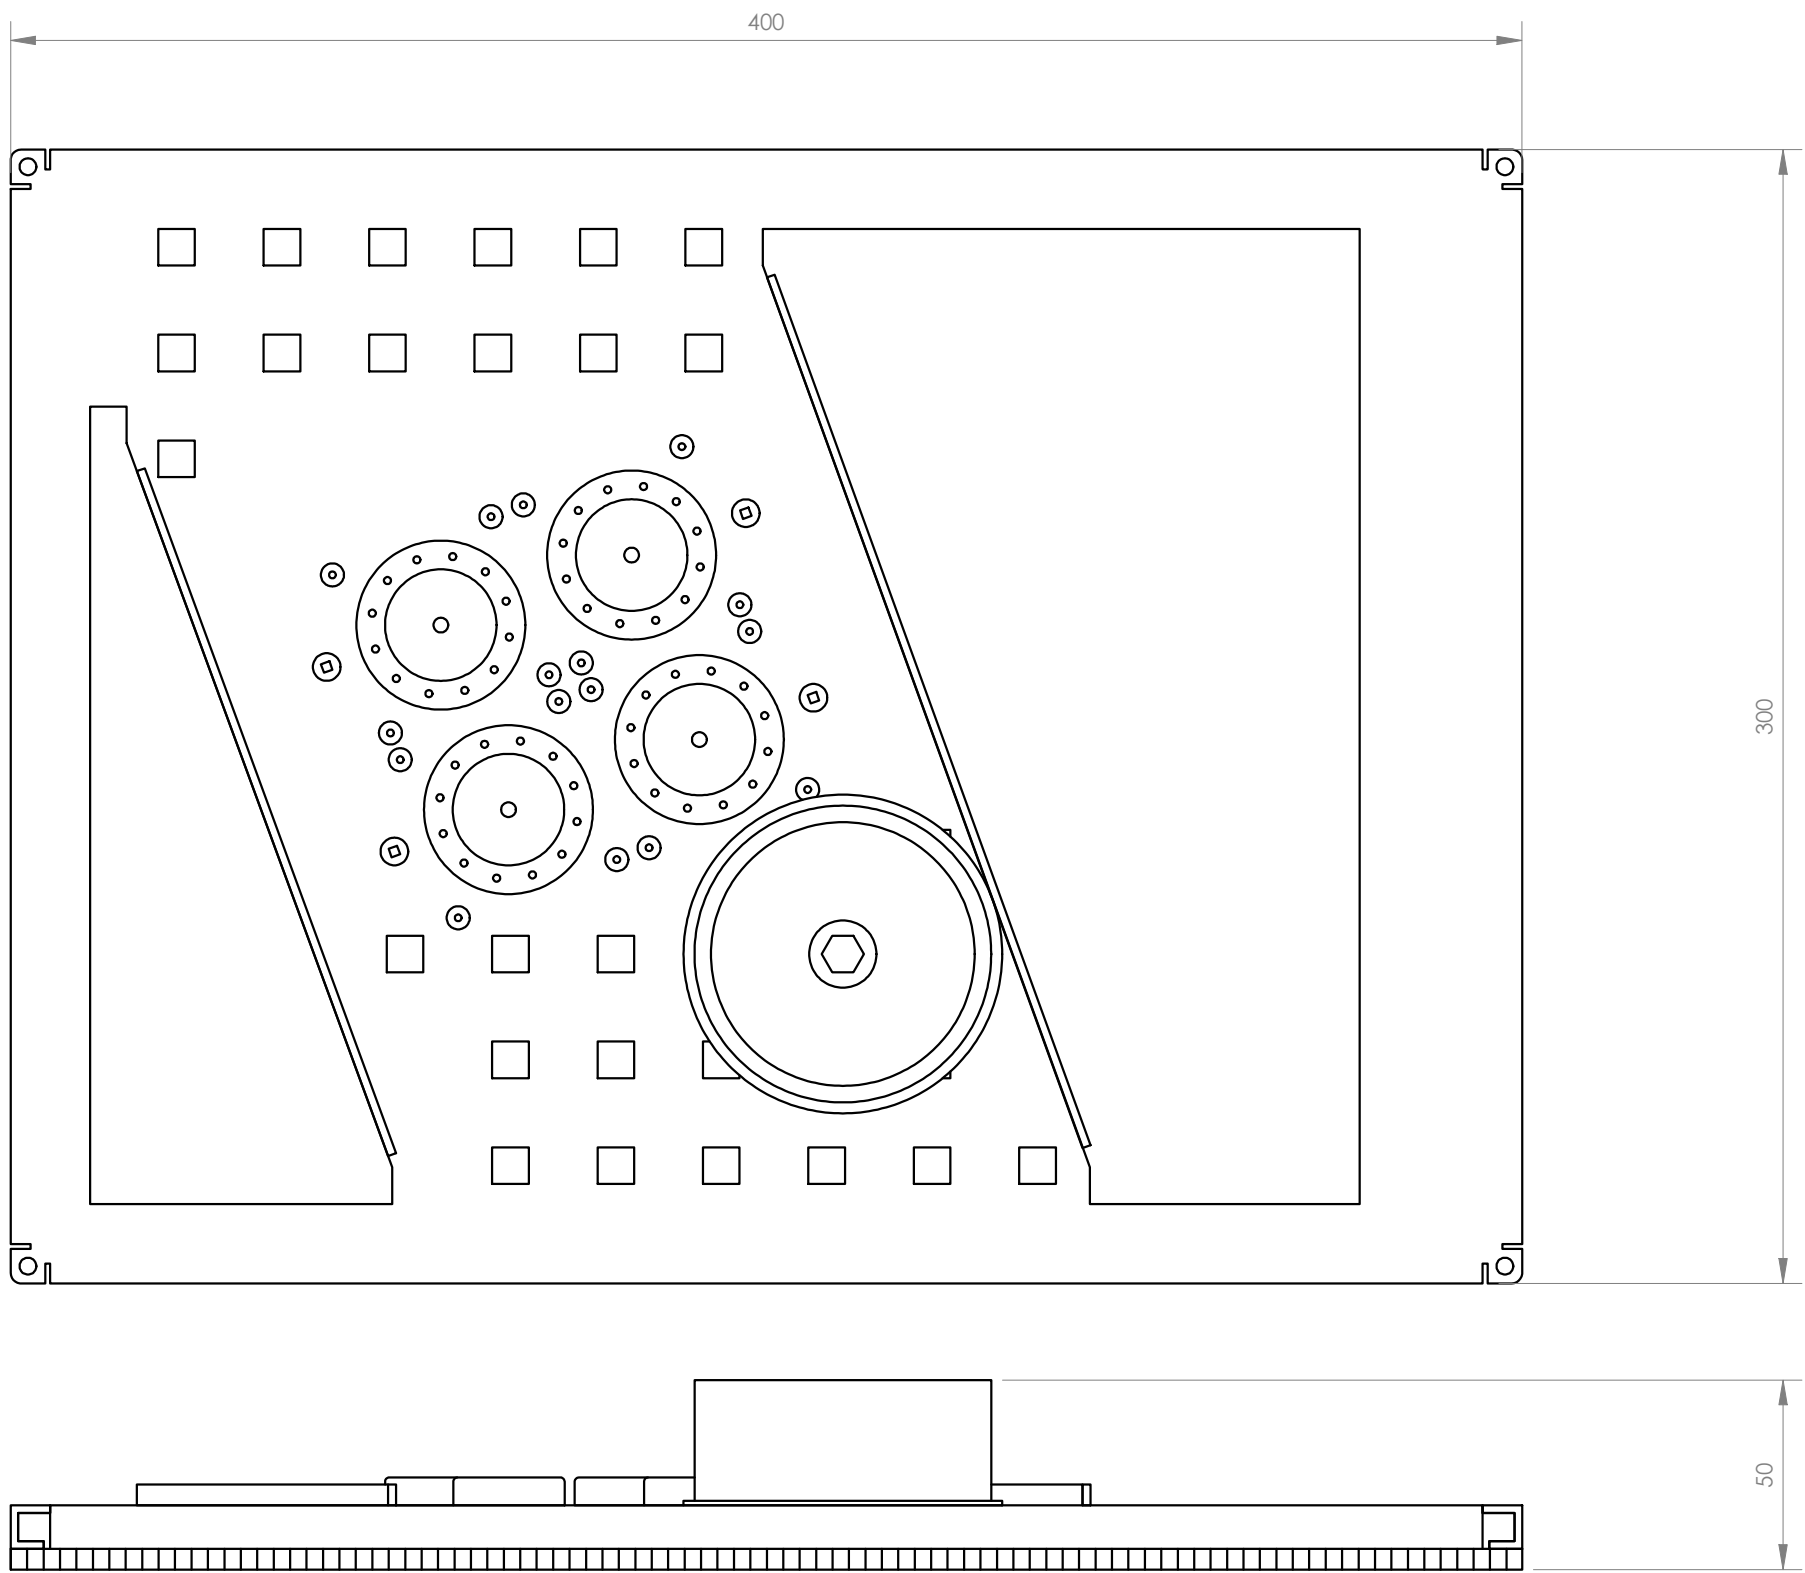

FONESTAR	Model	Description	Units	Scale
	TDO-45	70 AND 100 V LINE TRANSFORMER SURFACE SPEAKER	mm	1:2