

SYSTEMS AND CONTROL / ZONE SYSTEMS / ANALOGUE

## ZSC-1110

10-ZONE SWITCHING UNIT FOR 100 V LINE



- ✓ Excellent features
- ✓ Switching of 10 zones, expandable to 300 zones
- ✓ Musical alert tones
- ✓ Suitable for PA installations of any size

ESPECIALLY RECOMMENDED IN:



Education



Hotels






All sectors

## DESCRIPTION

Switching and control of 10 loudspeaker zones, expandable to 300 zones. Possibility to give announcements via microphone with zone selector mod. ZS-11. Up to 16 microphones with mod zone selector can be connected. ZS-11. It has 2 100 V line inputs for each zone, from the ambient music and paging amplifiers, general purpose inputs and outputs for connection to the alarm centre, line inputs and microphone inputs. For commercial installations that require different audio for each of the zones.

## TECHNICAL CHARACTERISTICS

FEATURES	<p>10-zone switching unit for 100 V line.</p> <p>Expandable to 300 loudspeaker zones with additional ZSC-1110 units.</p> <p>Suitable for PA installations of any size.</p> <p>Switching matrix status indicator lights.</p> <p>Musical alert tones.</p> <p>ZS-11 paging microphone, up to 16 microphones can be connected.</p> <p>Connection Cat 5e cable, RS-485 communication up to 1000 metres.</p> <p>Possibility to activate the priority on 24 V attenuators when paging with the ZS-1112R.</p>
INPUTS	<p>2 unbalanced mic., 6.3 mm jack 600 Ohm 5 mV</p> <p>2 unbalanced line, euroblock 10,000 Ohm 775 mV</p> <p>2 alarm activation through contact closure, euroblock</p> <p>10 x 100 V line for paging amplifier, maximum 500 W per zone, euroblock</p> <p>10 x 100 V line for background music amplifier, maximum 500 W euroblock</p> <p>1 paging mic., RJ-45</p>
OUTPUTS	<p>10 loudspeaker zone, maximum 500 W per zone, euroblock</p> <p>2 unbalanced line, euroblock 10,000 Ohm 775 mV</p> <p>2 alarm through contact closure, euroblock</p> <p>1 zone extension, RJ-45</p>
RESPONSE	<p>Microphones: 100 – 15,000 Hz</p> <p>Lines: 30 – 18,000 Hz</p>
CONTROLS	<p>Volume: microphones and chimes</p> <p>Tone:</p> <p>Bass: ±10 dB</p> <p>Treble: ±10 dB</p> <p>Chime activation</p> <p>Selection of zones 1 to 10 and general</p> <p>Music and paging selection</p>
POWER SUPPLY	230 V AC, 40 W
DIMENSIONS	484 x 88 x 340 mm depth. 2 U 19" rack
WEIGHT	5 kg

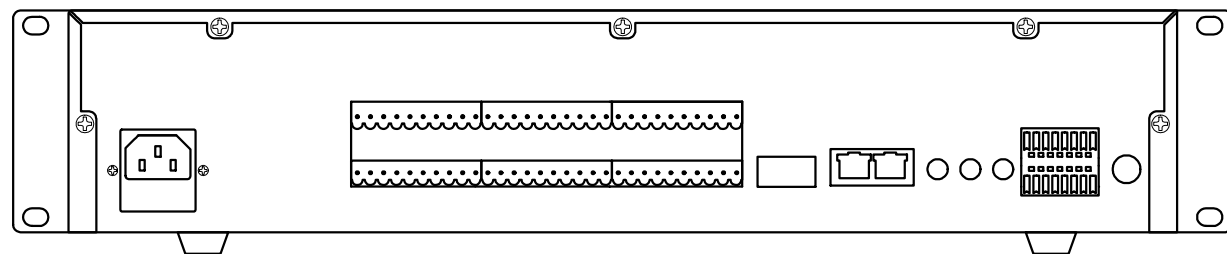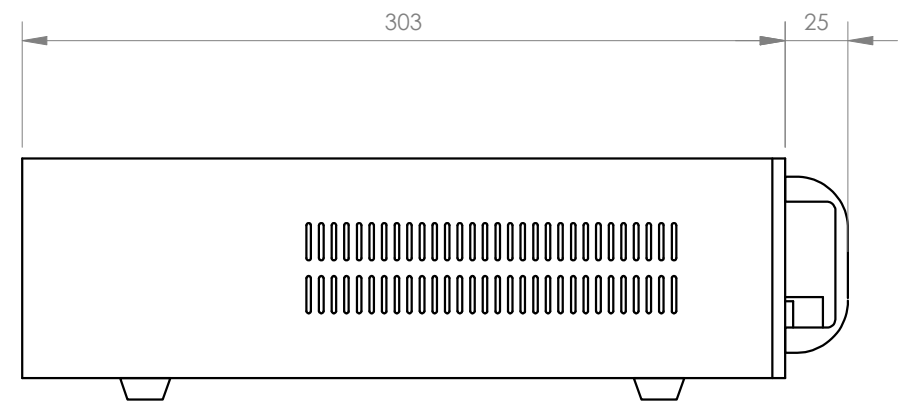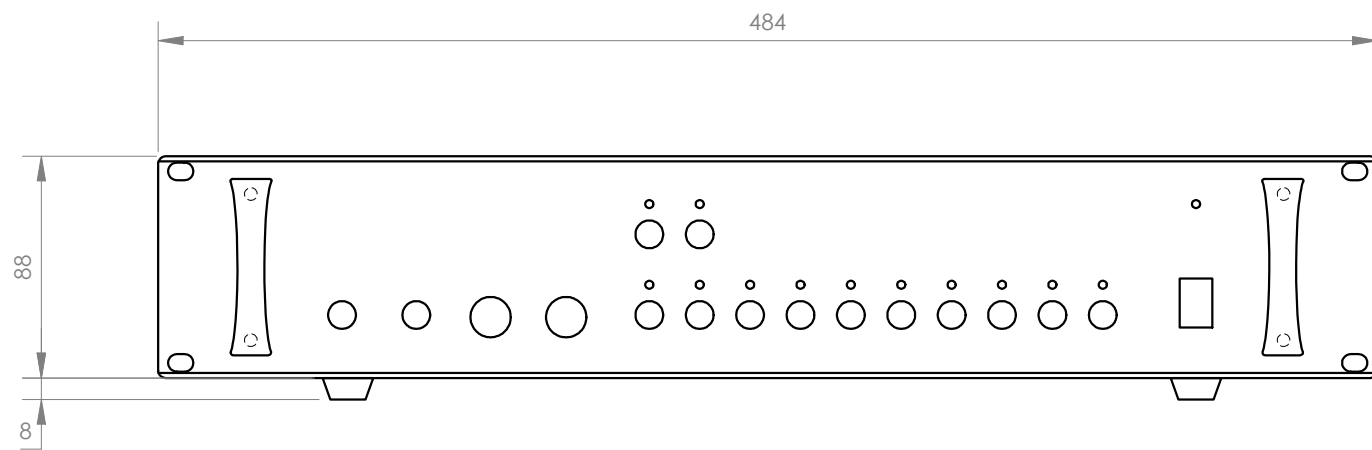

<b>FONESTAR</b>	Model	Description	Units	Scale
	ZSC-1110	10-ZONE SWITCHING UNIT FOR 100 V LINE	mm	1:3