

SYSTEMS AND CONTROL / ZONE SYSTEMS / ANALOGUE

MZ-648

6-ZONE SELECTOR MICROPHONE FOR MOD. SYSTEM MPZ-6480RGU



- ✓ Crystal clear voice pick-up
- ✓ 6 zone selector
- ✓ Remote playback of 6 messages
- ✓ Musical alert tones
- ✓ Auxiliary input

ESPECIALLY RECOMMENDED IN:







All sectors

DESCRIPTION

Microphone with zone selector for multizone amplifier MPZ-6480RGU.Possible to select up to 6 zones, play messages and chimes.

TECHNICAL CHARACTERISTICS

FEATURES	Microphone with 6 zone selector. Remote playback of 6 messages. Chimes. Internal memory to store messages and chimes. Aux input. For the multizone amplifier mod. MPZ-6480RGU.
MICROPHONE	Electret condenser with gooseneck
INPUTS	1 balanced mic. 1 paging microphone, RJ-45 1 aux, 2 x RCA
OUTPUTS	1 paging mic., RJ-45 1 PC connection, USB B
CONNECTION	RJ-45 cable, distance over 100 m
POWER SUPPLY	15 V DC, 0.8 A with adapter included, power supply through the amplifier or local power supply
DIMENSIONS	Microphone with gooseneck: 485 mm height Base: 220 x 55 x 160 mm depth
WEIGHT	1 kg

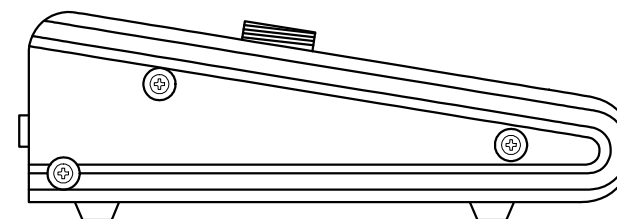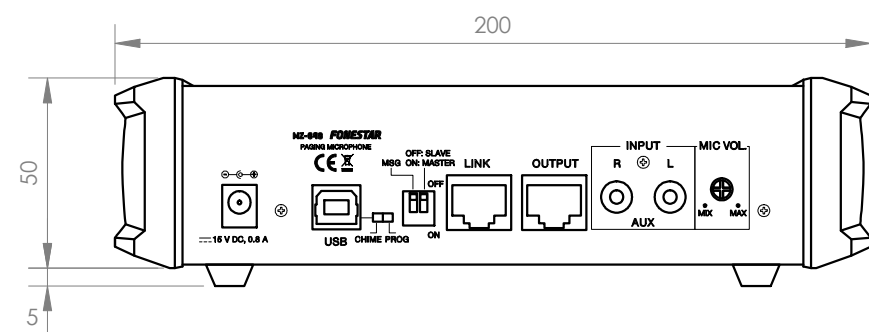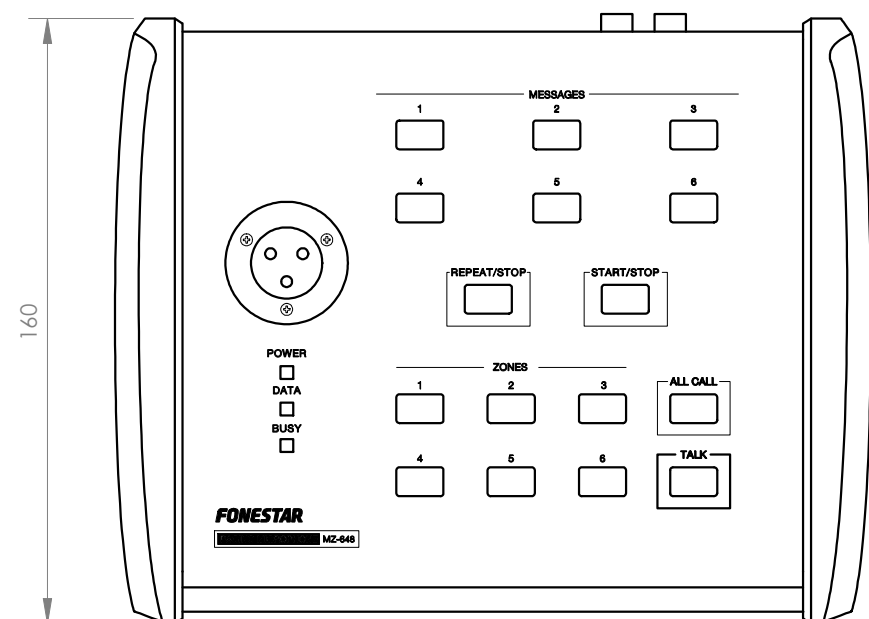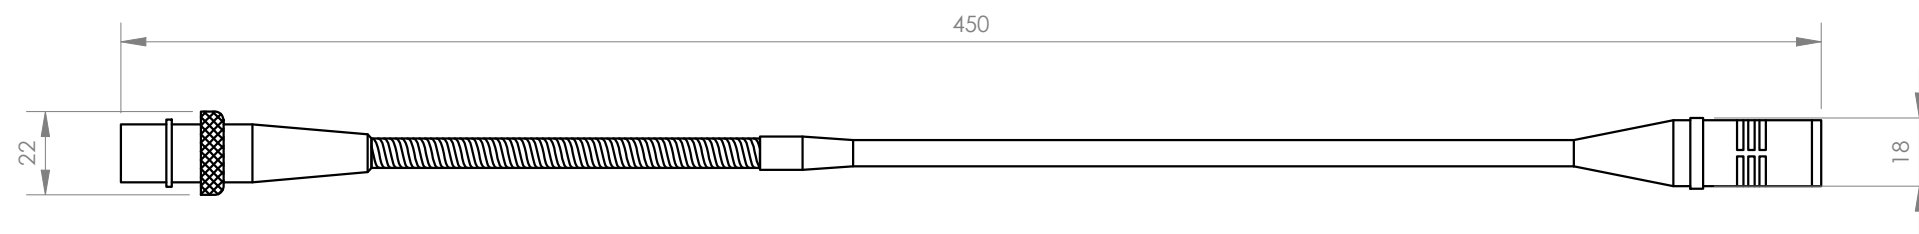

FONESTAR

Model
MZ-648

Description
6-ZONE SELECTOR MICROPHONE
FOR MOD. SYSTEM MPZ-6480RGU

Units
mm

Scale
1:2